


IF LOCATED IN A PAVED AREA, A CONCRETE COLLAR PER STANDARD DRAWING "UTILITIES 4" IS REQUIRED

CLASS 2 NON-WOVEN GEOTEXTILE MIRAFI 180 N OR APPROVED EQUAL AROUND MANHOLE AND AROUND DRAIN FIELD

OIL AND DEBRIS SEPARATOR WITH ANTI SIPHON INSTALLED PER MANUFACTURER'S RECOMMENDATIONS (SEE NOTE #5)

*OVERFLOW DISCHARGE TO APPROVED DRAINAGE. RCP-SAME CAPACITY AS INLET PIPE.

* MAY BE REQUIRED BY CITY ENGINEER

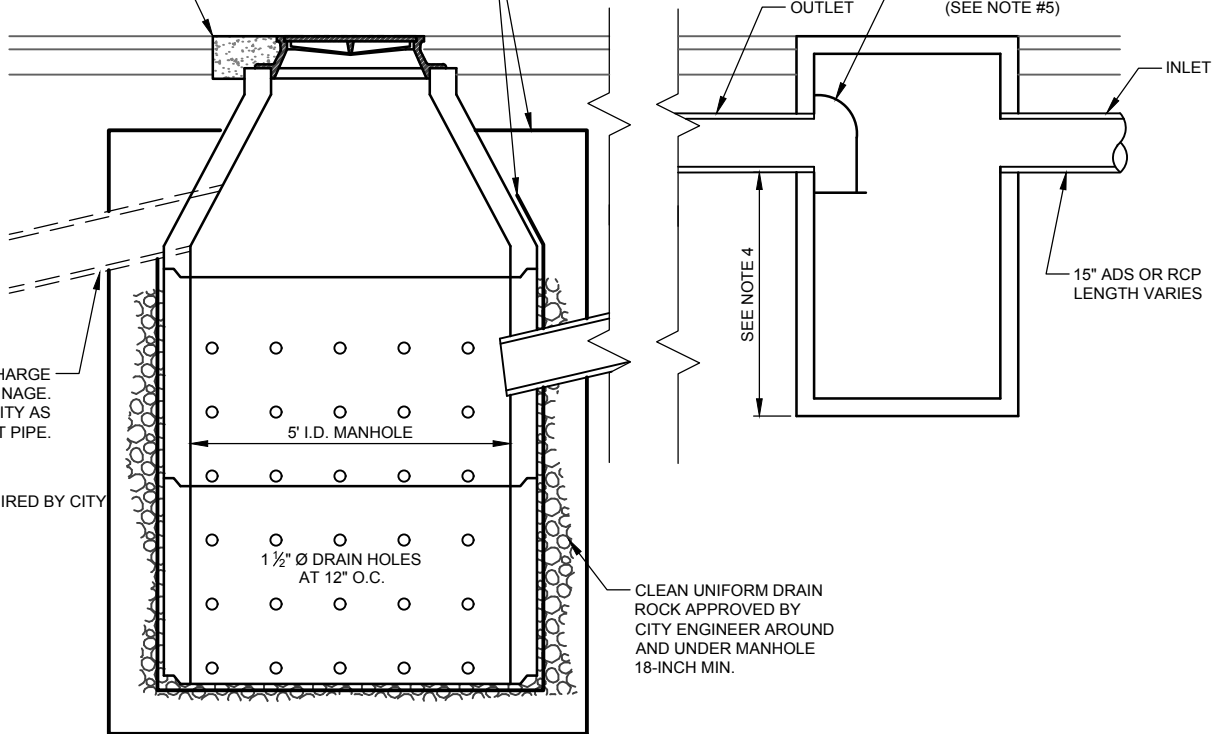

SECTION A-A

NOTES:

1. CONSTRUCT DROP INLET BOX TO MATCH WIDTH OF CURB & GUTTER. MATCH INSIDE LENGTH OF BOX TO INSIDE LENGTH OF FRAME.
2. D & L I-3516 WITH ADJUSTABLE CURB BOX.
3. STANDARD CAST IRON MANHOLE RING & LID.
4. SUMP DEPTH = 36" MIN. FOR 12" DIAMETER OUTLET AND SMALLER, FOR OUTLET DIAMETER 15" AND LARGER, DEPTH = 2.5 TO 3 TIMES THE DIAMETER.
5. SEE STANDARD SPECIFICATION 02772 PONDS.

SUMP DISPOSAL & OIL SEPARATOR

V:\ENGR\Stus\StusSpec\StusSpec 2019\Drawg Files\STORM DRAIN-3.dwg - Sump Oil - 2/06/2019 11:30am. rfunk


HORROCKS ENGINEERS

728 WEST 100 SOUTH #2
HEBER CITY, UTAH 84032
(435) 654-2226

DATE: FEBRUARY 2019

SCALE: N.T.S.

75 NORTH MAIN STREET
HEBER CITY, UTAH 84032
(435) 654-0757



HEBER CITY STANDARD DRAWING

STORM DRAIN-3